

USB-KNX Interface

OCI702



USB-KNX interface with cables and service bag

The USB-KNX interface OCI702 serves to provide a USB-KNX connection to access tools from a Microsoft Windows PC to a KNX network or individual device. It consists of the OCI702 service interface as well as several connection cables and accessories including cable ties and a service bag.

Features

- USB - KNX connection to access tools from a Microsoft® Windows® PC (standard USB port) to KNX bus
- Pluggable interface to PC's USB port
- USB powered
- Provides power to the KNX bus of 25 mA, DC 29 V
- Supports long frames of up to 64 bytes
- Compatible with software tools ETS3 (or later), KNX EITT, ACS V10 (or later) and Desigo™ TRA tools.

Use

The interface supports, together with the appropriate PC software, device commissioning and servicing with KNX communication, for example, from the following ranges:

- Synco™ 700 controllers and room devices
- KNX room thermostats RDF..., RDG..., RDU341
- Individual room controllers RXB... / RXL...
- Synco™ living central apartment units QAX9...
- Desigo™ TRA
- GAMMA devices

Technical design



The OCI702 service interface provides two connection plugs with two LED indicators.



OCI702 service interface

LED indicators

Two LED indicators, labeled  and , indicate the operational state.

LED	Color and status		Indication
	Green	ON	USB power on
		Flashes	Data exchange between service interface and PC
	Green	ON	Service interface is connected to KNX device
		Flashes	Data exchange between service interface and device
	Red	ON *)	Bus power overload
		Flashes	Jack plug is not fully plugged in

*) In this case, an additional KNX bus power supply is required to power the KNX bus if the LED is permanently red.

Interfaces

USB	Connection plug Type B for USB cable
KNX	Connection plug RJ45 for KNX connection cable

NOTICE! The interfaces on the OCI702 are galvanically separated.

USB cable

The length of USB cable is 0.2 m. The USB port connecting the PC is USB 2.0, also compatible with USB 3.0, Type A. The USB port connecting the interface is USB Type B.



KNX power switch

The service interface includes a power supply, providing 25 mA, DC 29 V power to the KNX bus. The KNX bus power supply can be manually switched on and off using the slider switch on the side of the interface (default position: off).


KNX connection cable

Three KNX connection cables (3 m each) provide three different connectors to the KNX network or KNX device:


- Jack plug – 2.5 mm connector (Desigo™ TRA)



- RJ45 connector (Synco™ 700)



- KNX TP bus terminal

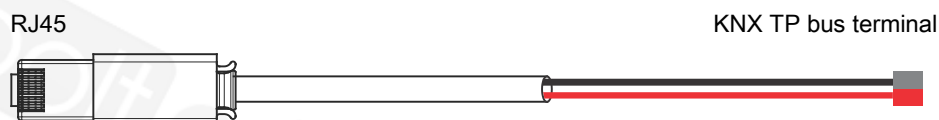

Engineering

The service interface does not require a separate power supply.

- Power is supplied to the USB connector via USB port on the PC.
- The service interface includes a small power supply, providing 25 mA, DC 29 V power to the KNX bus.

Mounting

The service interface is designed for portable use.

Commissioning

The service interface does not require parameterization.

Maintenance

The service interface is maintenance-free.

Disposal



The device is considered an electronics device for disposal in terms of European Directive 2012/19/EU and may not be disposed of as domestic garbage.

- Dispose of the device through channels provided for this purpose.
- Comply with all local and currently applicable laws and regulations.

Technical data

Power supply

Operating voltage (from USB)	DC 5 V as per USB specifications
Power consumption	Max. 500 mA

KNX interface

Connection	2-wire connection, non-interchangeable
KNX cable length	3 m
Baud rate	9600 baud
Bus load number E	Dynamic / adaptive
Bus power supply	25 mA, DC 29 V can be switched off and on manually with slider switch

USB interface

Standard	USB 2.0 or higher
Device class	HID (human interface device)
Baud rate	Max. 12 Mbps (full speed)
USB cable <ul style="list-style-type: none"> ● Plug on PC ● Plug on OCI702 ● Cable length 	<ul style="list-style-type: none"> ● USB Type A ● USB Type B ● 0.2 m

Ambient conditions and protection classification

Degree of protection of housing to EN 60529	IP20
Permissible environmental conditions for transportation and storage <ul style="list-style-type: none"> ● Temperature ● Humidity 	<ul style="list-style-type: none"> ● -25...70 °C ● <95 % r.h. (non-condensing)
Permissible environmental conditions for operation <ul style="list-style-type: none"> ● Temperature ● Humidity 	<ul style="list-style-type: none"> ● -5...55 °C ● <85 % r.h. (non-condensing)

Standards

EU conformity (CE)	8000079437
RCM conformity	8000079489
Environmental compatibility	The product environmental declaration 8000079311 contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).


General

Dimensions	74 x 44 x 19.5 mm
Weight (device complete with packaging)	319 g

Connection terminals


The following KNX pin assignments on the OCI702 service interface apply to assembly of own connection cables:

Pin assignment KNX, RJ45



- 1 CE+, KNX
- 2 CE-, KNX
- 3 Unused
- 4 Unused
- 5 Voltage 16 V
- 6 Unused
- 7 Ident'pin
- 8 Ground

Dimensions (mm)

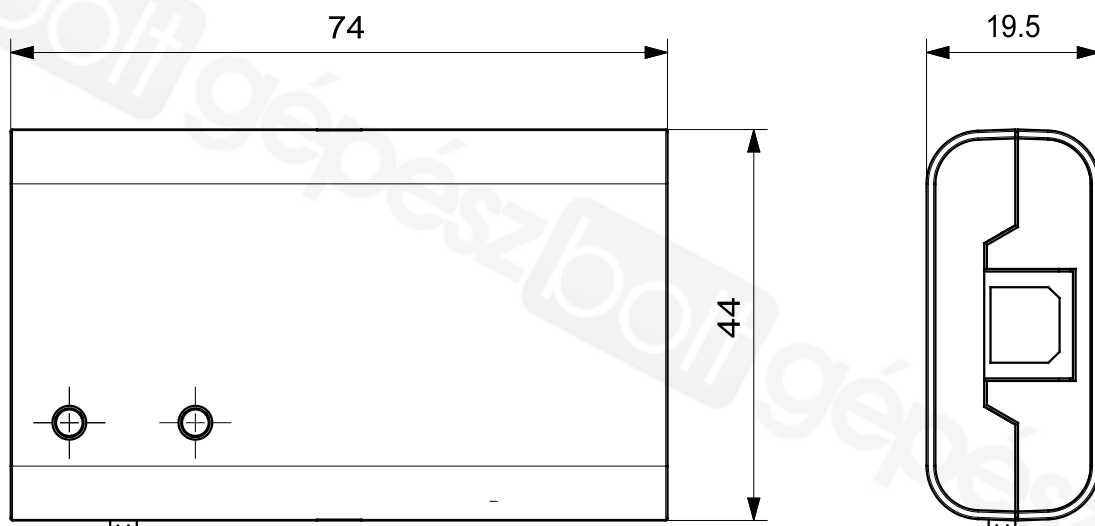

Issued by
Siemens Switzerland Ltd
Building Technologies Division
International Headquarters
Gubelstrasse 22
CH-6301 Zug
Tel. +41 41-724 24 24
www.siemens.com/buildingtechnologies

© 2014 Siemens Switzerland Ltd
Technical specifications and availability subject to change without notice.