

DRAUGHT REGULATOR SERIES ATA200

The ESBE draught regulator series ATA200 is a control device intended to regulate the temperature of solid fuel fired boilers by adjusting the air supply.



OPERATION

The ESBE draught regulator series ATA200 is an independent thermostatic expansion control device intended to regulate the temperature of solid fuel fired boilers by adjusting the air supply. No electrical wiring or complicated fitting is required. The thermostatic control head senses the boiler temperature and through a lever and chain adjusts the position of the air vent, thereby regulating the combustion air supply to the boiler. The ESBE draught regulator is fully adjustable within the range of 35-95°C. The draught regulator is connected directly to the boiler waterway through a threaded immersion pocket.

MOUNTING

The draught regulator series ATA200 may be mounted either horizontally or vertically (knob upwards). The chain should be connected from the lever to the air vent so that it just closes as the required temperature has been reached.

SERVICE AND MAINTENANCE

The draught regulator series ATA200 does not normally require any maintenance. However, if needed, the thermostatic capsule may be replaced after first removing the regulator from the immersion pocket.

DRAUGHT REGULATOR ATA200 DESIGNED FOR

- Heating

TECHNICAL DATA

Max. working temperature: _____ 100°C
 Regulating range: _____ 35-95°C
 Lifting force: _____ 10 N
 Lifting stroke: _____ 55 mm
 Chain length: _____ 1,6 m
 Connection: _____ External thread, ISO 228/1



Material

Metal parts: _____ Steel

Surface treatment: _____ Zinc plated

PED 2014/68/EU, article 4.3

INSTALLATION EXAMPLE

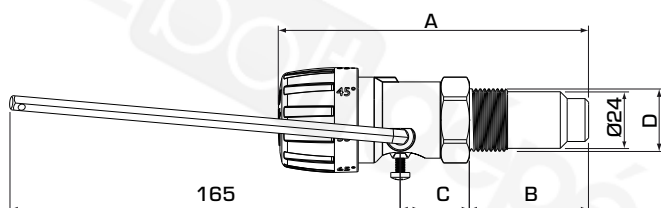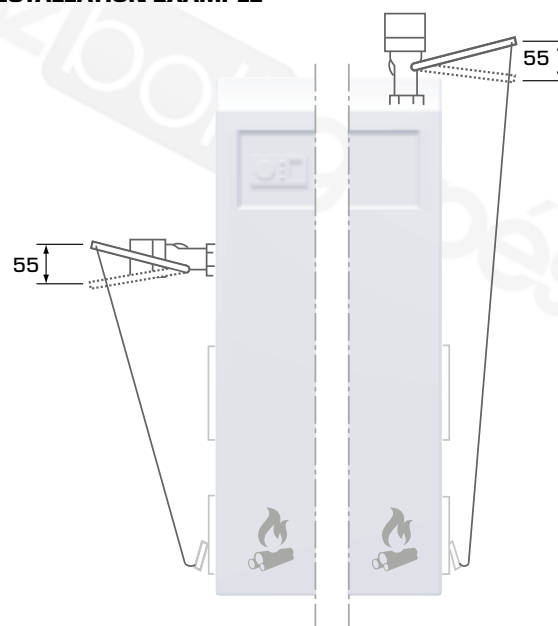

SERIES ATA200

Art. No.	Reference	Lifting force [N]	Temp. range	Connection	Dimension			Weight [kg]	Replaces
					A	B	C		
56001100	ATA212	10	35-95°	G 3/4"	130	50	29	0,38	31800200
56001500					155	75	29	0,41	—